


Backflow / Booster Pump Enclosure

Placer Waterworks Inc.

1325 Furneaux Road
Plumas Lake, CA. 95961
(530) 742-9675

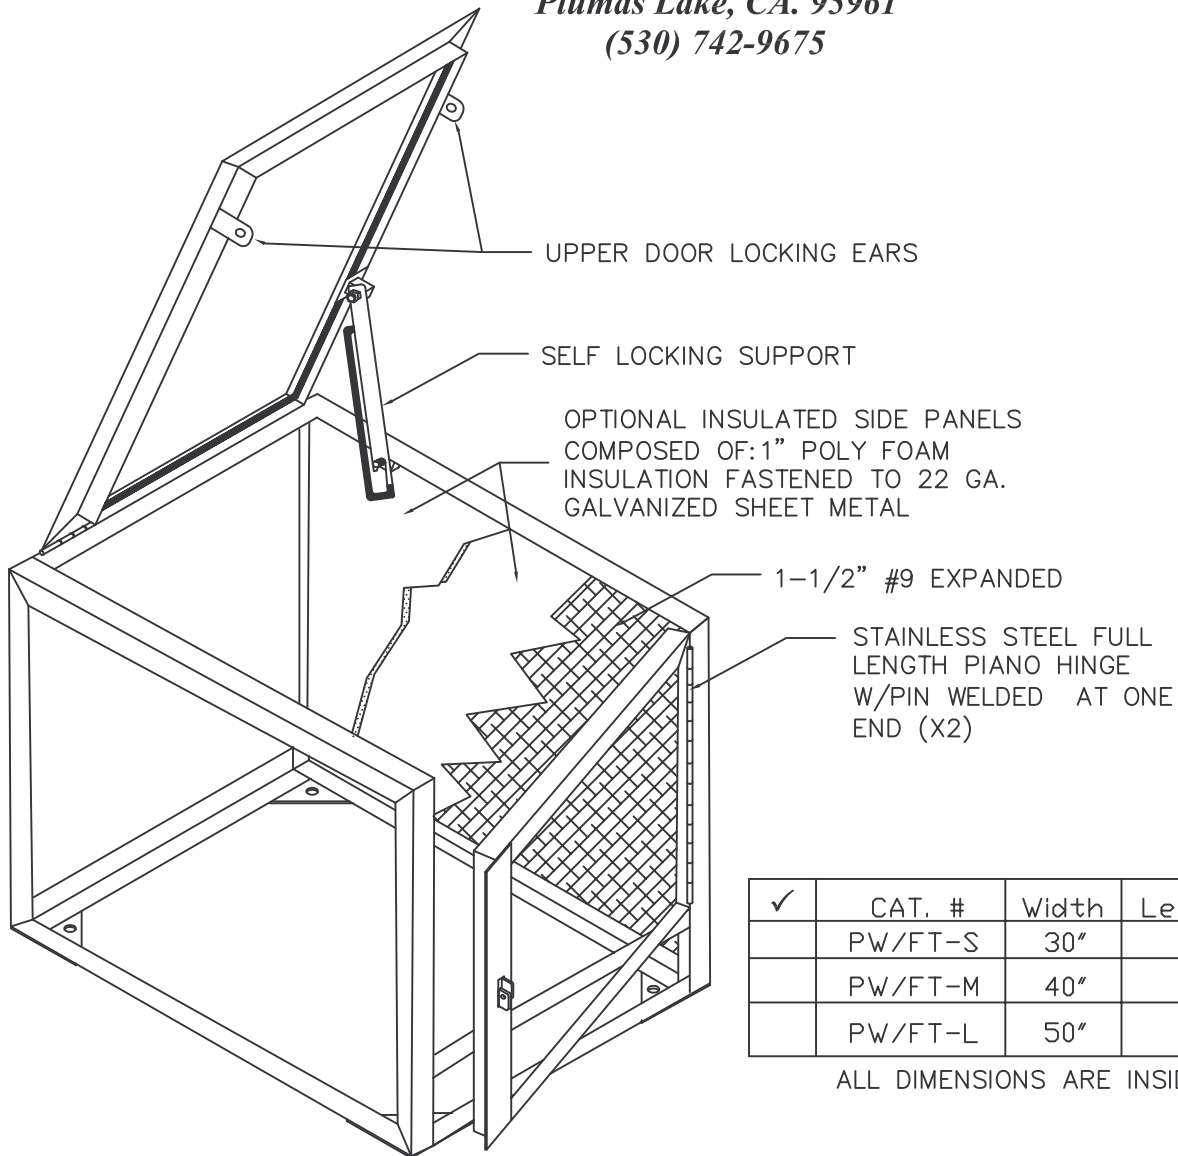

✓	CAT. #	Width	Length	Height
	PW/FT-S	30"	40"	40"
	PW/FT-M	40"	50"	50"
	PW/FT-L	50"	60"	60"

ALL DIMENSIONS ARE INSIDE DIMENSIONS

NOTES: TWO DOOR TYPE

1. FRAME MATERIAL IS 1-3/4" X 1-3/4" X 3/16" ANGLE IRON.
2. EXPANDED METAL SCREEN IS NO. 9 1-1/2" WELDED EVERY 6"
3. BOTH DOORS HAVE STAINLESS STEEL PIANO HINGES WITH PINS WELDED AT ONE END.
4. UPPER DOOR HAS OPEN POSITION SELF LOCKING SUPPORT.
5. UPPER DOOR ACCESS IS OBTAINED BY REMOVAL OF (2) 3/8" BOLTS FROM THE INTERIOR OF ENCLOSURE.
6. (4) FOUNDATION ANCHOR PLATES 1/4" THICK WITH 5/8" HOLE.
7. ALL PARTS SAND BLASTED TO SSPC-5 WHITE METAL BLAST, WITH A 2-3 MILS ANGULAR PROFILE WITHIN 4 HOURS OF COATING PROCESS.
8. POWDER COATED HUNTER GREEN, TO 3 MILS THICKNESS AFTER FABRICATION.
9. SINGLE LOCK SECURITY OBTAINED BY SPRING LOADED STAINLESS STEEL LOCKING RODS.
10. ALL WELDING DONE PER AWS SPECIFICATIONS.

This drawing must be signed and returned
returned to Placer Waterworks Inc. when
order is placed and before work is started.

