Vault Safety Aluminum Up-Post

Placer Waterworks Inc.

1325 Furneaux Road
Plumas Lake, CA. 95961
(530) 742-9675

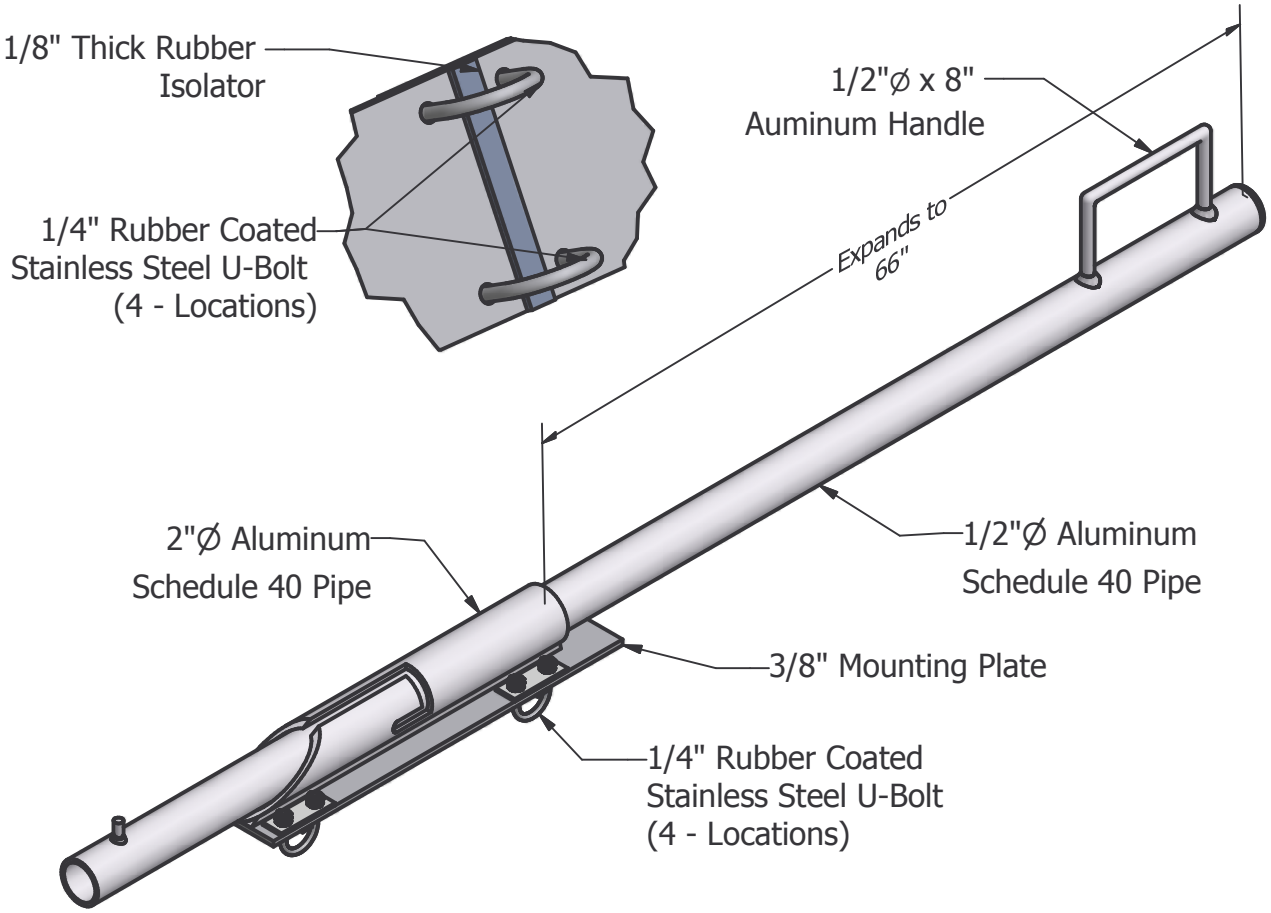

NOTE:

1. All material (unless otherwise noted) is 6061-T6
2. All welding done per AWS Specifications.
3. Up-Post is to have Rubber Isolators between Up-Post and Up-Post fastener and the ladder to reduce the chance of corosion between metals.
4. Up-Post to be mounted on the top two steps of the ladder.
5. Up-Post, when in the lowered position will not interfer with the closing of access cover.
6. Operation of Up-Post requires only one hand:
   a) To use the Up-Post, lift post to the full up position and rotate "counter-clockwise" and drop into the 'Locked" position.
   b) To lower just lift and rotate "clockwise" and lower to the stored position.

This drawing must be signed and returned returned to Placer Waterworks Inc. when order is placed and before work is started.

7/2/2009

CAT#:SUP-A